



REVISIONS

REV	DESCRIPTION	DESIGN	DATE
01	INITIAL RELEASE	Ryan	2020.07.07
02	CHANGE THE THICKNESS OF ITO GLASS	Ryan	2020.07.09

TOP VIEW

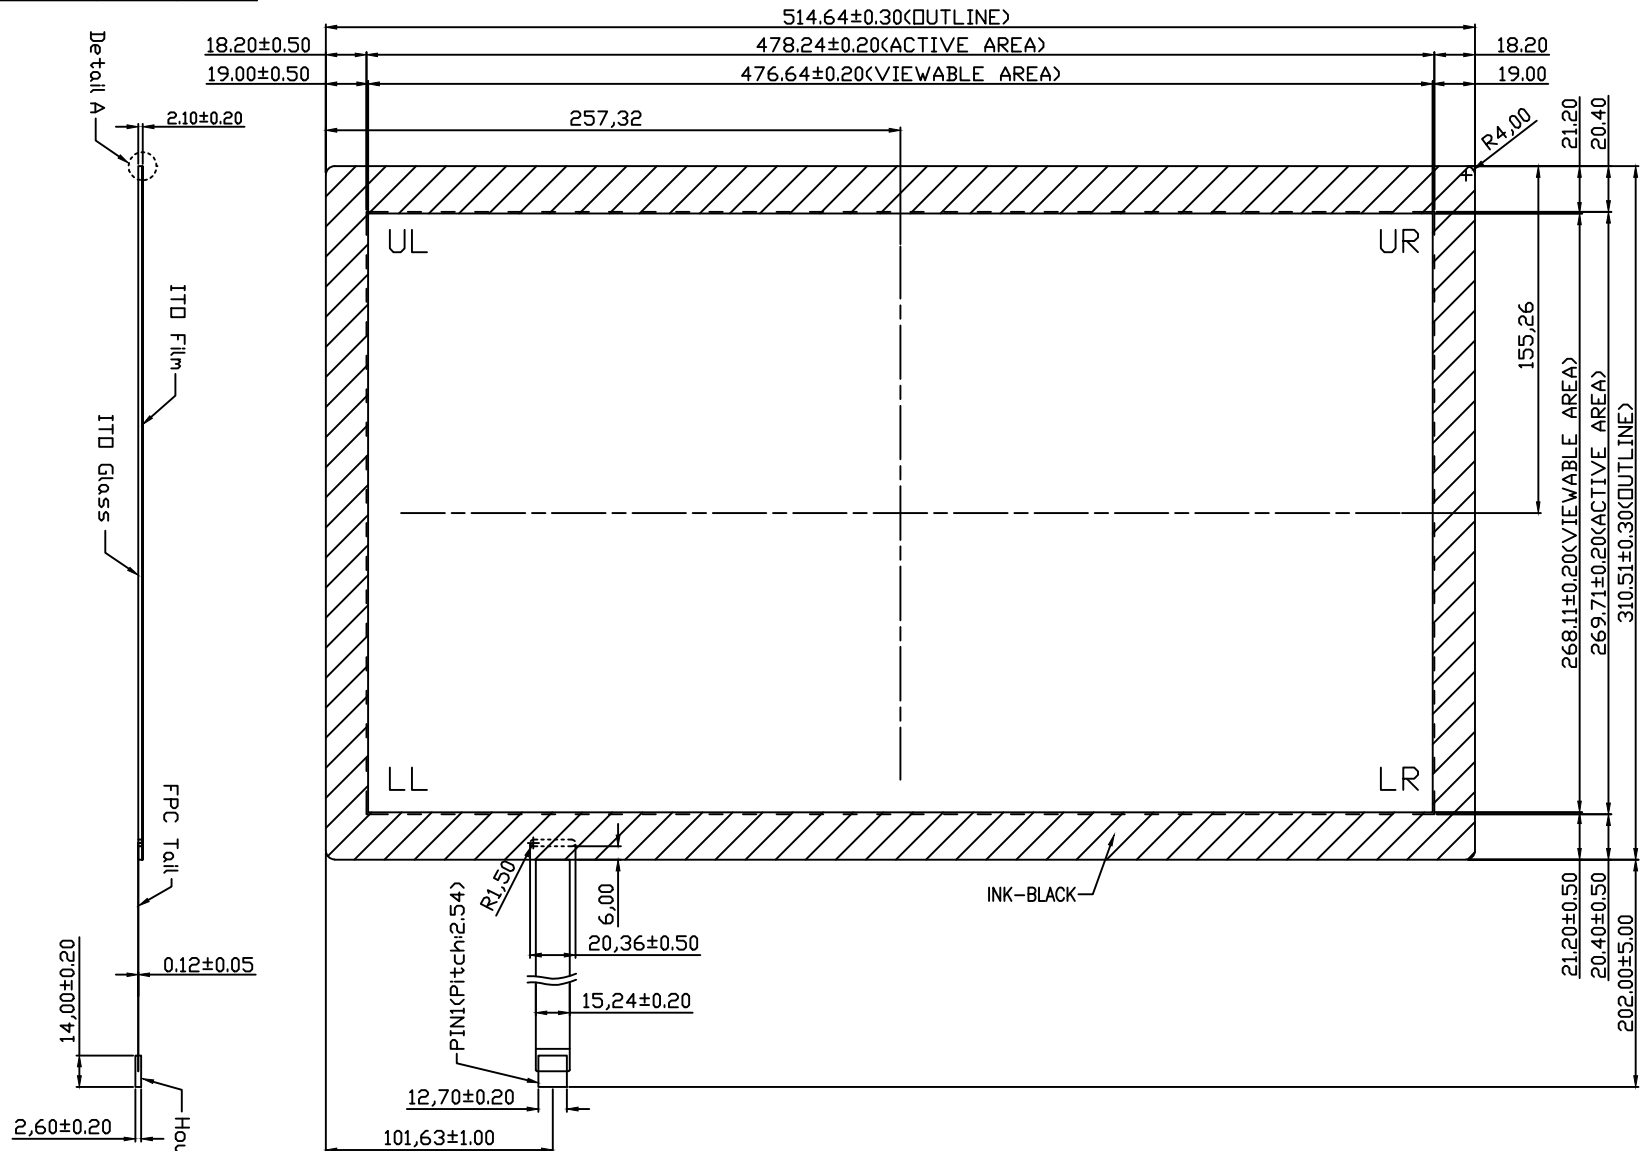


Connector Pinout	
Pin NO.	Designation
1	UL
2	UR
3	SG
4	LL
5	LR



HOUSING

NOTES:

- Optical Specifications:
 - Transparency: 80±3%
 - Haze: 5±3% (Clear type)
- Electrical Specifications
 - Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC



ITO Film 0.188mm
Adhesive 0.08mm
ITO Glass 1.8mm

Detail A

UNIT	mm.	奇畿科技股份有限公司 Miracletouch Technology Inc.	REV	DATE	DESIGN	DATE	APPROVED
THIRD ANGLE	MODEL		01	2020.07.07	Ryan	2020.07.07	Eric
	DRAWING NO.	21.5" 5W Touch Panel	02	2020.07.09	Ryan	2020.07.09	Eric
		11215023					