




| REVISIONS | | | |
|-----------|-----------------|--------|------------|
| REV | DESCRIPTION | DESIGN | DATE |
| 01 | INITIAL RELEASE | Ryan | 2021.02.09 |
| | | | |
| | | | |

| Connector Pinout | |
|------------------|-------------|
| Pin NO. | Designation |
| 1 | UL |
| 2 | UR |
| 3 | SG |
| 4 | LL |
| 5 | LR |

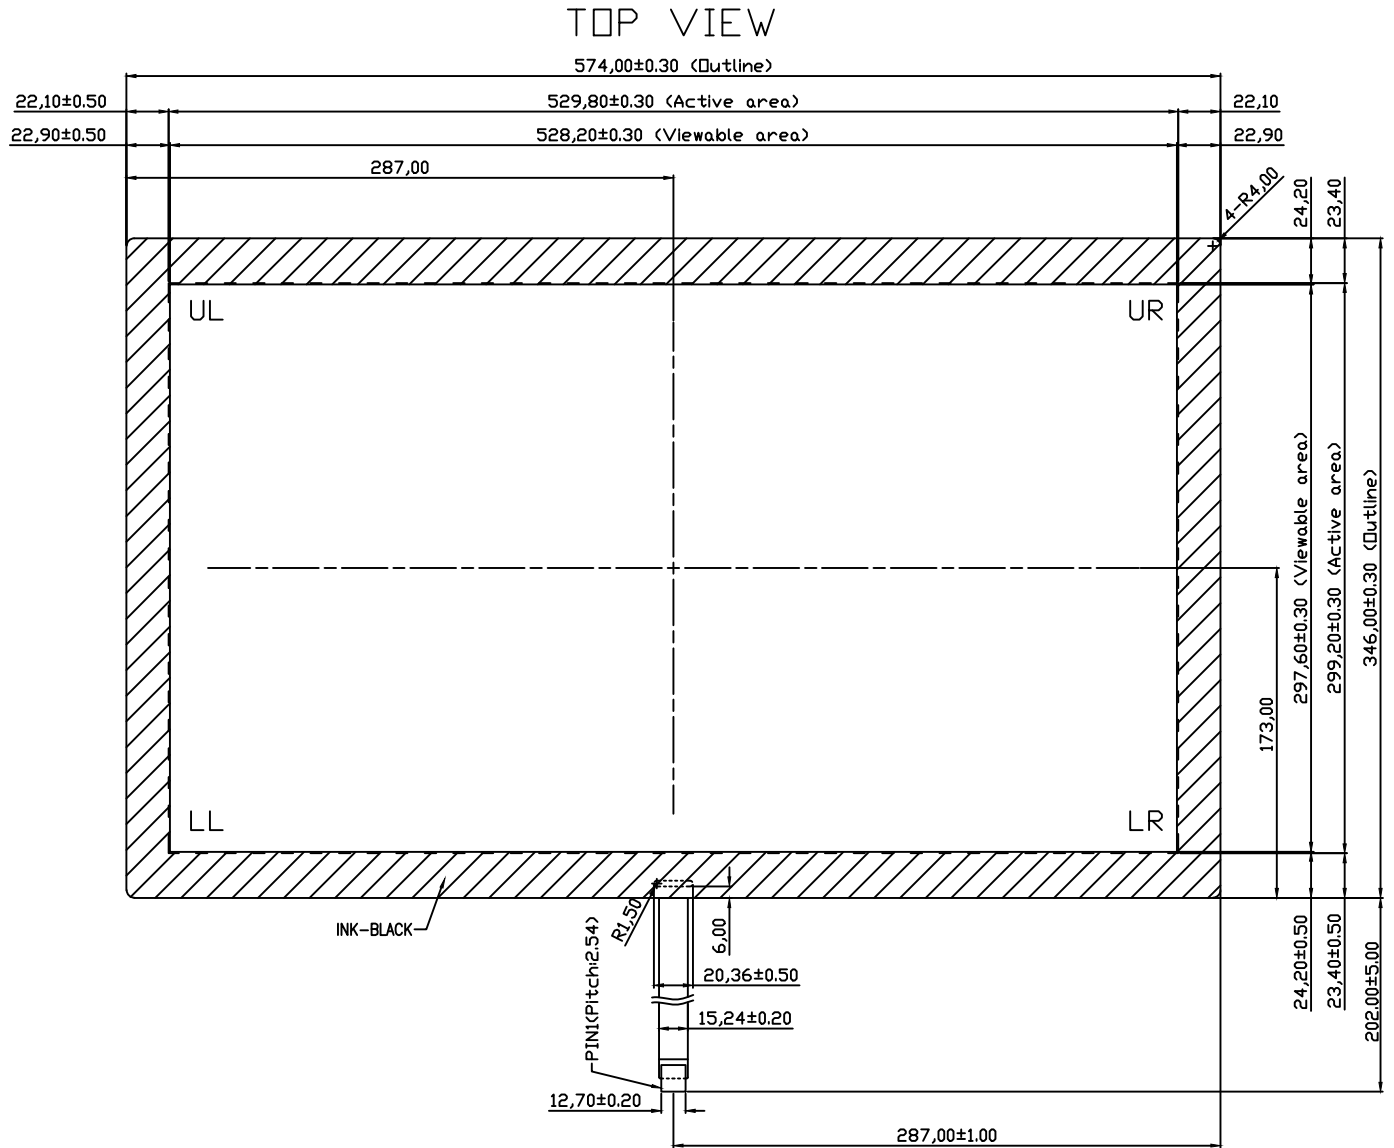


HOUSING

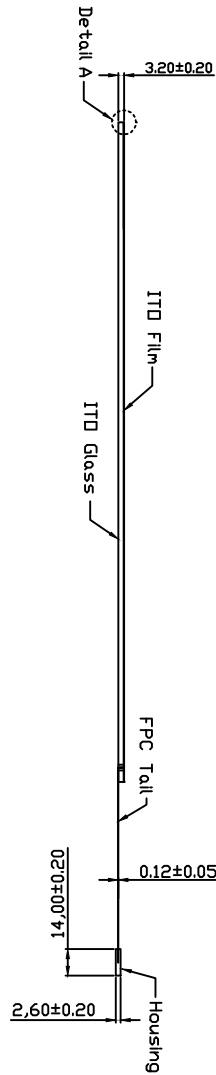

NOTES:

- Optical Specifications:
 - 1.1 Transparency: 80±3%
 - 1.2 Haze: 5±3% (Clear type)
- Electrical Specifications
 - 2.1 Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - 2.2 Voltage endurance DC 50V/60sec.
 - 2.3 Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - 2.4 Insulation resistance ≥ 20MΩ/25VDC



Detail A

ITD Film 0.188mm
Adhesive 0.08mm
ITD Glass 2.8mm

| | | | | | | | | | |
|-------------|--|----------|--|--|-----|------------|--------|------------|----------|
| UNIT | | mm. | 奇機科技股份有限公司 Miracletouch Technology Inc. | | REV | DATE | DESIGN | DATE | APPROVED |
| THIRD ANGLE | | MODEL | 23.8" 5W Touch Panel | | 01 | 2021.02.09 | Ryan | 2021.02.09 | Eric |
| DRAWING NO. | | 11238007 | | | | | | | |