
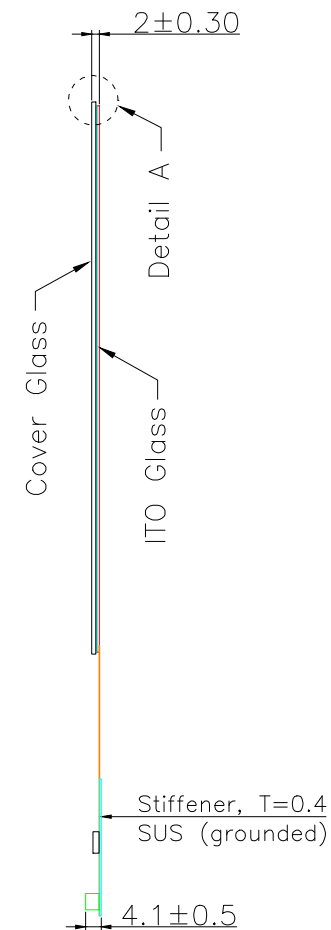



# TOP VIEW

REVISIONS			
REV	DESCRIPTION	DESIGN	DATE
01	INITIAL RELEASE	Leo	2022.06.09
02	CHANGE THE SENSOR DESIGN SIZE	Leo	2022.06.24

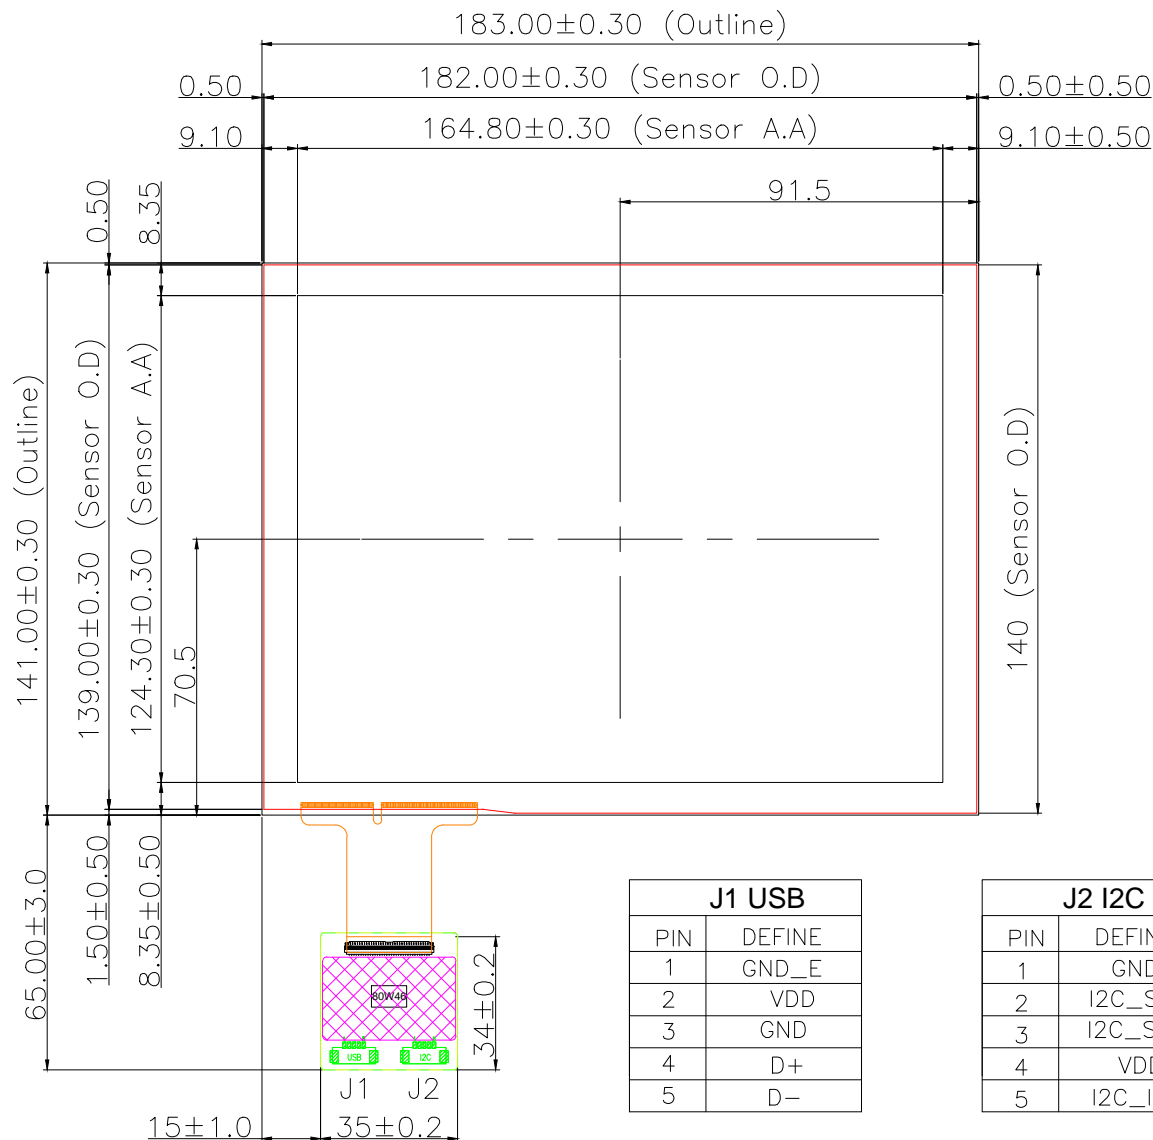

J1 USB	
PIN	DEFINE
1	GND_E
2	VDD
3	GND
4	D+
5	D-

J2 I2C	
PIN	DEFINE
1	GND
2	I2C_SDA
3	I2C_SCL
4	VDD
5	I2C_INT



- Note:
- Operating Temperature: -20~70
  - Storage Temperature: -30~80
  - Surface Hardness: ≥ 7H
  - Controller: FPC+Control Board(EXC80W46)
  - Connector: 50271-00501-001  
FPC Connector: 51607-0710M-001
  - Unspecified Tolerance: ±0.5mm

 CS Glass 1.1t  
 Optical Adhesive  
 ITO Glass 0.7t

Detail A

UNIT	mm.	奇畿科技股份有限公司 Miracletouch Technology Inc.		REV	DATE	DESIGN	DATE	APPROVED
THIRD ANGLE		MODEL	8.0" PCT Touch Panel	01	2022.06.09	Leo	2022.06.09	Eric
		DRAWING NO.	22080002	02	2022.06.24	Leo	2022.06.24	Eric