


REVISIONS			
REV	DESCRIPTION	DESIGN	DATE
01	INITIAL RELEASE	Eric	2015.06.29
02	DESIGNED TO LIGHT TOUCH TYPE	Ryan	2015.10.30


Connector Pinout		
Pin NO.	Designation	
1	LR	
2	LL	
3	SG	
4	UR	
5	UL	



HOUSING


NOTES:

- Optical Specifications:
 - Transparency: 79±3%
 - Haze: 8±3% (Anti Glare)
- Electrical Specifications
 - Loop resistance X: 20Ω~500Ω, Y: 20Ω~500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC
- Operating Force ≤ 50g (R0.8 Touch Pen)



Detail A

ITD Film 0.188mm
Adhesive 0.06mm
ITD Glass 1.80mm

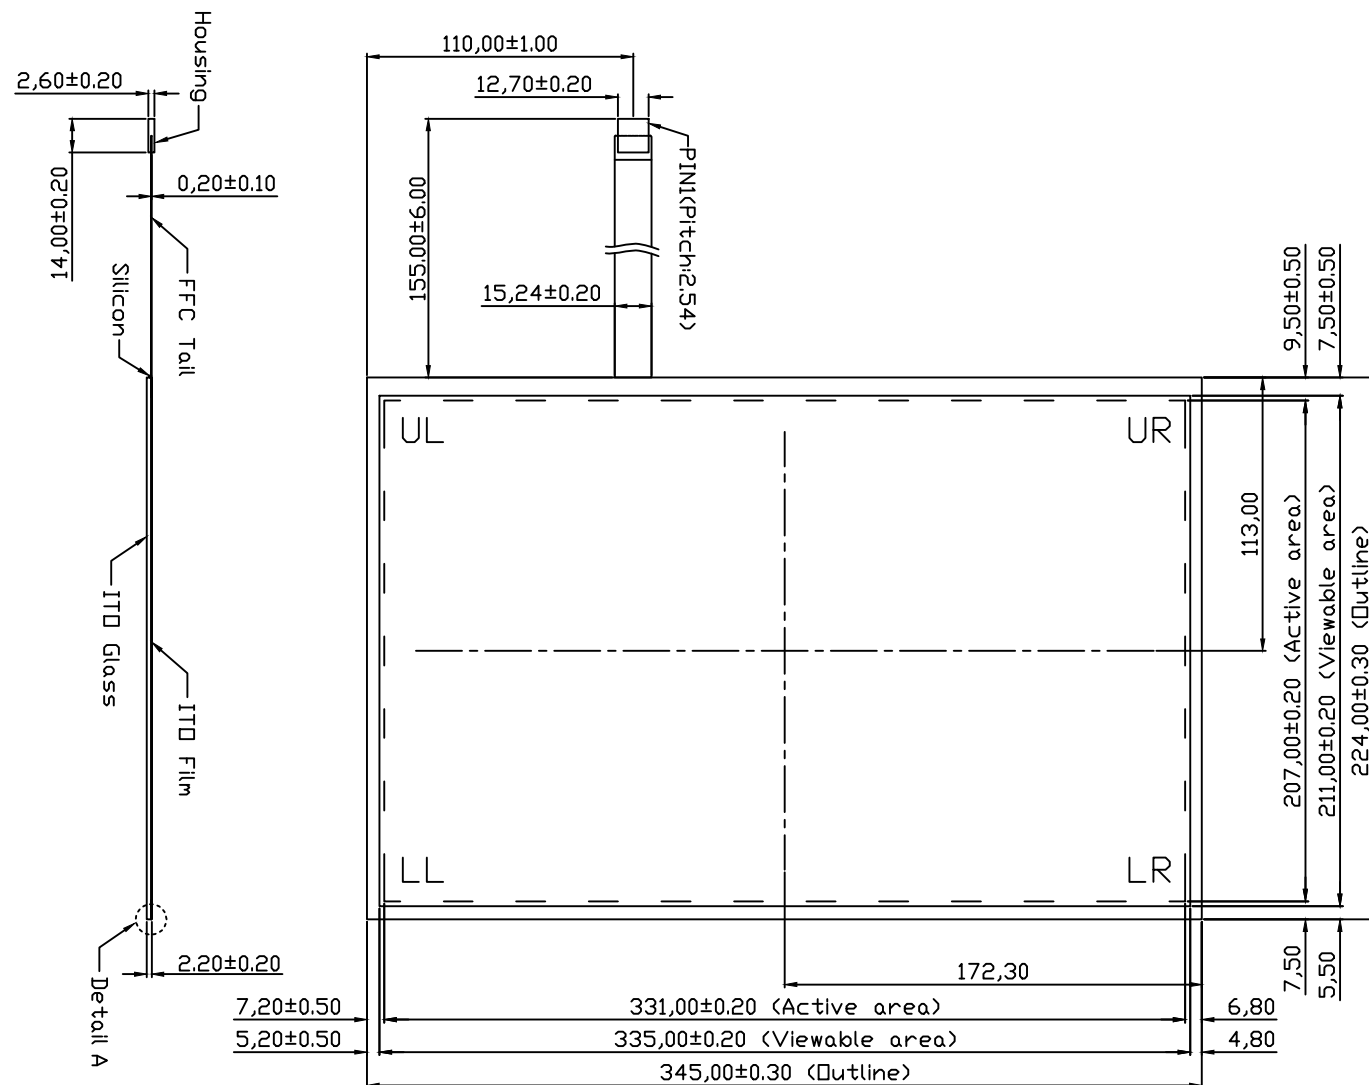

UNIT		mm.		奇幾科技股份有限公司		REV	DATE	DESIGN	DATE	APPROVED
THIRD ANGLE		MODEL		Miracletouch Technology Inc.		01	2015.06.29	Eric	2015.06.29	Eric
DRAWING NO.		15.4" 5W Touch Panel				02	2015.10.30	Ryan	2015.10.30	Eric
		10154003								