
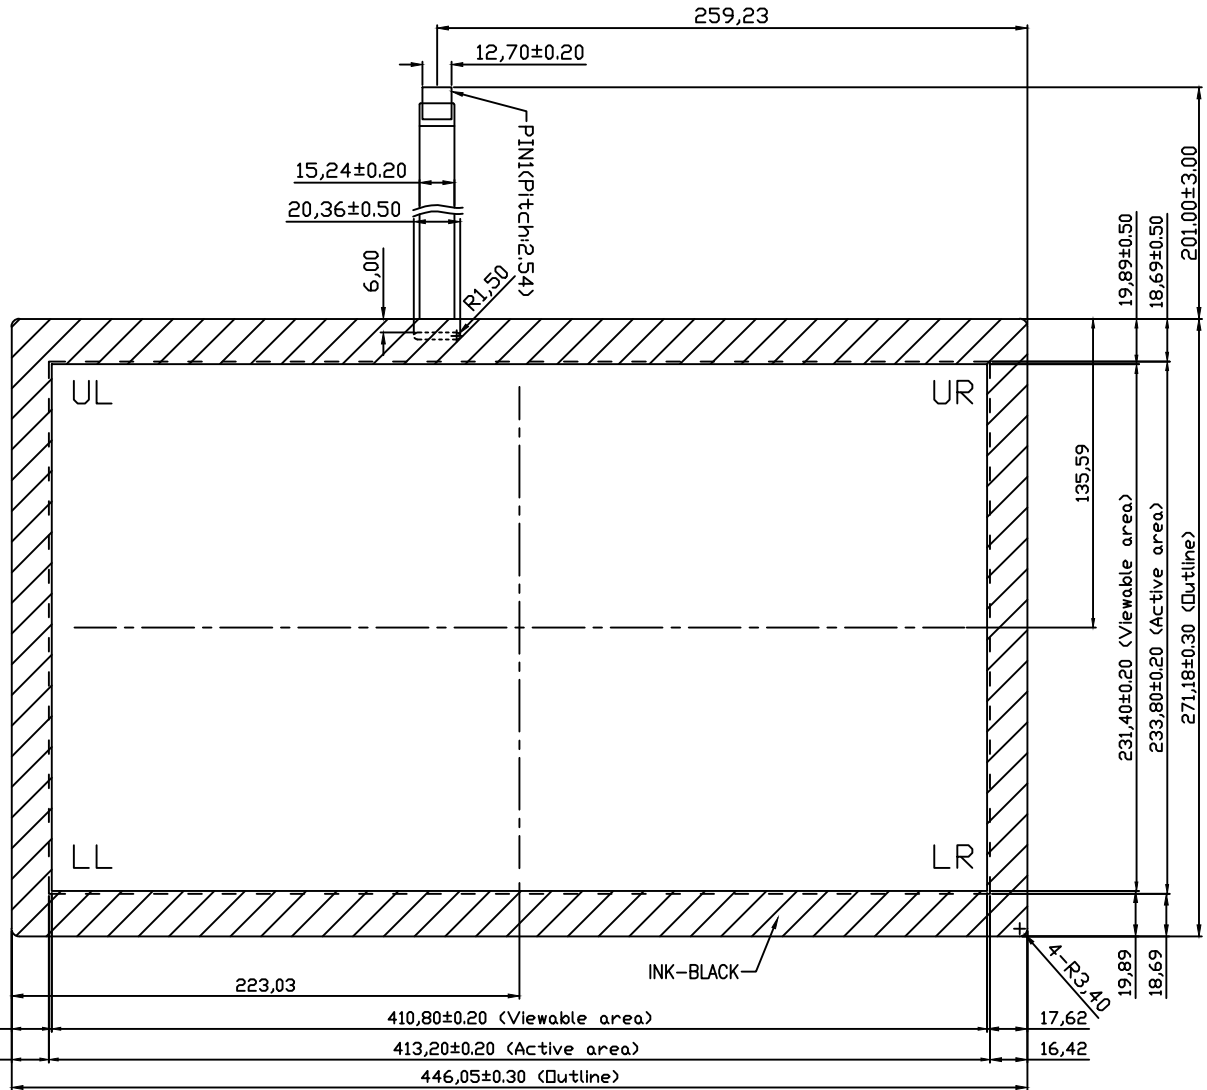
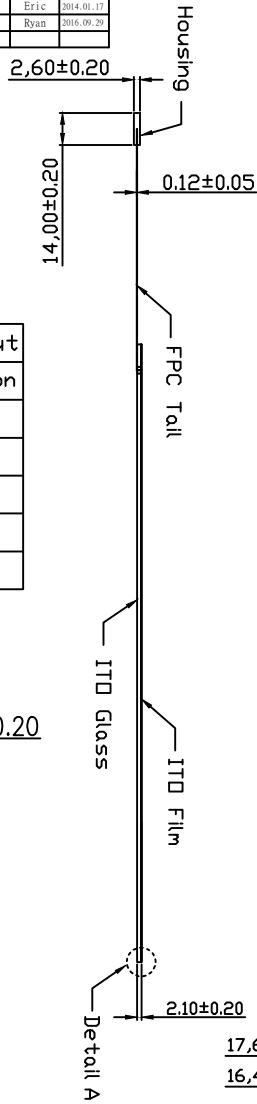


REVISIONS			
REV	DESCRIPTION	DESIGN	DATE
01	INITIAL RELEASE	Eric	2014.01.17
02	DESIGN CHANGE ITO FILM MATERIAL	Ryan	2016.09.29

Connector Pinout	
Pin NO.	Designation
1	UR
2	LR
3	SG
4	UL
5	LL



TOP VIEW

NOTES:

- Optical Specifications:
 - Transparency: 80±3%
 - Haze: 10±3% (Anti Glare)
- Electrical Specifications:
 - Loop resistance X: 20Ω-500Ω, Y: 20Ω-500Ω
 - Voltage endurance DC 50V/60sec.
 - Linearity deviation X ≤ 1.5%, Y ≤ 1.5%
 - Insulation resistance ≥ 20MΩ/25VDC
- Operating Force ≤ 50g



KA500PS1-188-MN3
Adhesive 0.08mm
ITD Glass 1.8mm

UNIT	mm.	奇機科技股份有限公司 Miracletouch Technology Inc.		REV	DATE	DESIGN	DATE	APPROVED
				01	2014.01.17	Eric	2014.01.17	Eric
				02	2016.09.29	Ryan	2016.09.29	Eric
THIRD ANGLE	MODEL	18.5" 5W Touch Panel						
	DRAWING NO.	11185005						